

ust 3D on timber	6
ust 3D on steel	3
ust 3D for glass doors	10

Hinges suitable for flush fit technical doors

Adjustable hinges for flush fit doors. The Just 3D hinge has been developed to meet the requirements of both public and private sectors, to have a flush fit adjustable hinge technically state of the art. Just 3D is easy to fit and to adjust: +/-2,5mm in height, horizontal and gasket pressure. Adjustment is simple and can be carried out by one person using a 4mm Allen key.

Just 3D is not only aesthetically pleasing and fully adjustable, it also offers a guarantee of long term, trouble free functionality. Self lubricating bushes ensure smooth, long term operation, which has been tested in accordance with RAL standards. Just 3D has achieved a load rating of 140 Kg in this test.



Just 3D adjustable hinge

For application on solid timber and cover frames





Being of symmetrical design, Just 3D suits both left and right handed applications. Security screws ensure suitability for both internal and external doors.


The range of components, enables Just 3D to be applied to steel, solid timber and cover frames. A steel support will be supplied for cover frame applications, which must be fastened on the back of the frame.


To give doors more added value, all visible components can be produced in stainless steel. The steel version is available in zinc and matt nickel finishes.

it.sfs.com/UR025 →



Description and Accessories

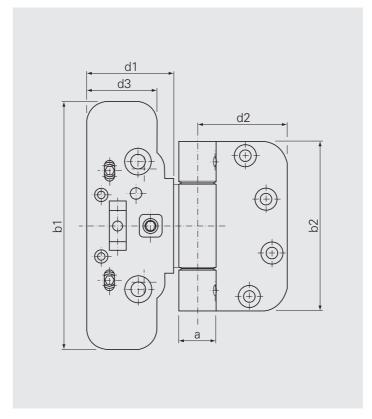

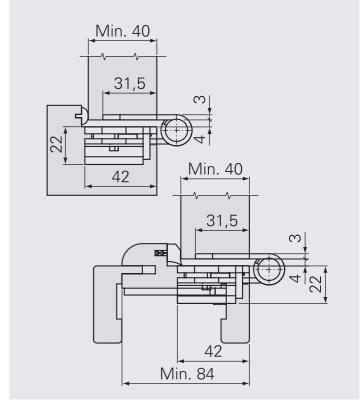

Ordering codes	Product	Finish	Packaging	Load capacity	Kg.
1272308	J3DS001/01XS	Brushed Stainless Steel	2pcs	2 hinges	140
777656	J3DS001/01NO	Matt Nickel	-		
1272307	J3DS001/01SZ	Zinc			

Jig

Jigs			
1361197	BA-A-E3D30/J3D	Milling jig for sash	T-
1272108	BA-AF-J3D-00	Milling insert	• •
		for sash	L.
1272107	BA-T-J3D-00	Milling jig	
		for frame	

Ordering code for covering frame

777659	Zinc	20pcs.	-,

SFS | Hinge technology | SFS

Just 3D adjustable hinge

For application on steel frames







Just 3D for steel frames has the same technical and adjustment characteristics of the other versions.

Just 3D has been fitted on hospital the doors and public environments both in Italy and abroad, fully satisfying the needs of customers.

Le Just 3D has been tested on fire doors and certified from the IFT institute in Rosenheim.

Description and Accessories

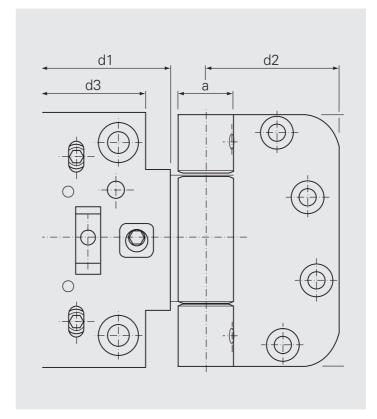

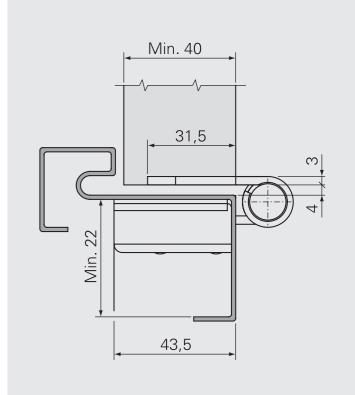

Ordering codes	Product	Finish	Packaging	Load capacity	Kg.
1272306	J3DS000XS	Brushed Stainless Steel	2pcs.	2 hinges	140
777653	J3DS000NO	Matt Nickel			

Jigs

1361197	Milling jig for sash		
1272108	Milling insert for sash		


Ordering code for steel frame

•			
1272302	Zinc	20pcs.	6
			0

SFS | Hinge technology | SFS

Just 3D adjustable hinge

For glass doors

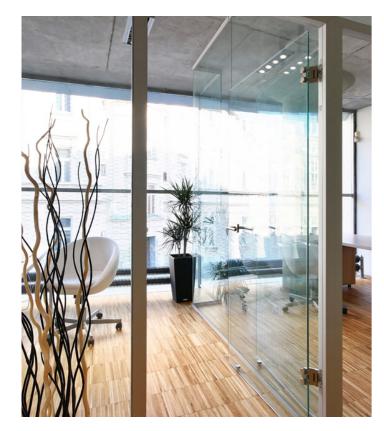






Just 3D for glass doors increases the range of this product. By keeping all the adjustment characteristics in the three dimensions of the other applications, this hinge has been designed to be applied on flush door frames from 40 to 44 mm.


For a correct application, the door can be 8/10/12 mm thick. Besides the jigs, identical for all applications, a specific key is available for tightening the stud

Description and Accessories












11





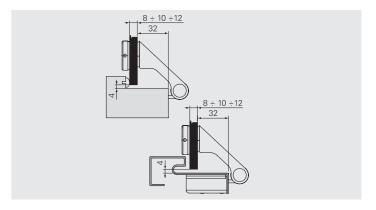

Ordering codes	Product	Finish	Packaging.	Load capacity	Kg.		
1333966	J3DHF05XS	Brushed Stainless Steel	2pcs	2pcs	2 hinges	50	
1376663	J3DHF05JNO	Matt Nickel					
Ordering code steel	l frame						
Ordering code steel	l frame						
1334376	J3DHM00XS	Brushed Stainless Steel	2pcs.				
Ordering code timb	er frame						
Ordering code timb	per frame J3DHMT01XS	Brushed Stainless Steel	2pcs.				

Milling jig for frame
1272107 1

Ordering code for steel frame					
1272302	Zinc	20pcs.	0		

